


PROJECT:

TYPE:

QUANTITY:

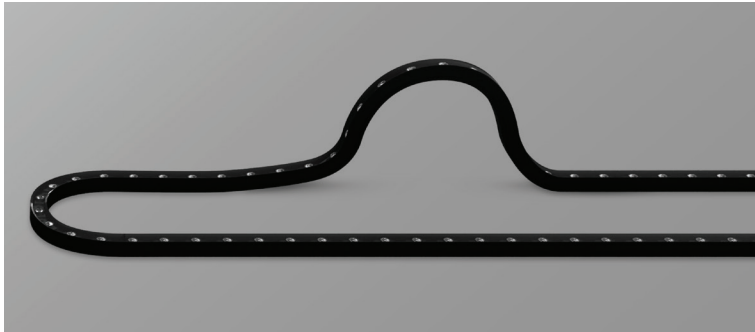

DESCRIPTION

Pro Flex is an advanced omni directional wall grazing system designed for seamless integration with flat, curved, and complex architectural surfaces. Engineered to deliver rich, vibrant color and dynamic lighting effects, it enhances alcoves, accent areas, and both interior and exterior environments. Available with multiple optical lens options to accommodate diverse project requirements, Pro Flex ensures fast, secure, and efficient installation with a comprehensive set of mounting clips and accessories.

- Multiple dimming interface: 0-10V, ELV, MLV, SWITCHED
- Low Voltage: 24V DC
- Dual Bend

SPECIFICATIONS

CCT	27K, 3K, 35K, 4K, 5k, 6K, RGB, RGBW, RGBWDMX
CRI	80 to 90
Controls	0-10V, ELV, MLV, SWITCHED, DMX
Optical Distribution	10° , 15° , 20° , 25° , 30° , 40° , 50° , 25°x50° , 45°x(30° & Asymmetric 15°)
Operating Temperature	-4~113°F (-20~45°C)
Lifespan	50,000h, L70 @ Tc≤65°C (149°F)
Power ±10%	7.62W/ft. (25W/M)
SMD Type	3535 (10° WL, 15° WL), 5050 (WL, RGBW, RGBW DMX)
Dimensions	W: 1.18" (30mm) H: 0.91"(23mm)
Applications	IP67, Wet, Cove, Perimeter Lighting, Grazing
Voltage	24V DC
Warranty	5 Years


FIXTURE RUN LENGTHS

Max Run Length	16.4ft
----------------	--------

OUTPUT

CCT	Lumens	Efficiency
2700K	686 lm/ ft	90 lm/ W
3000K	686 lm/ ft	90 lm/ W
4000K	686 lm/ ft	90 lm/ W
RGBW	330 lm/ ft	43 lm/ W
DMXRGBW	335 lm/ ft	-


STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.

Intertek

DIMENSIONS

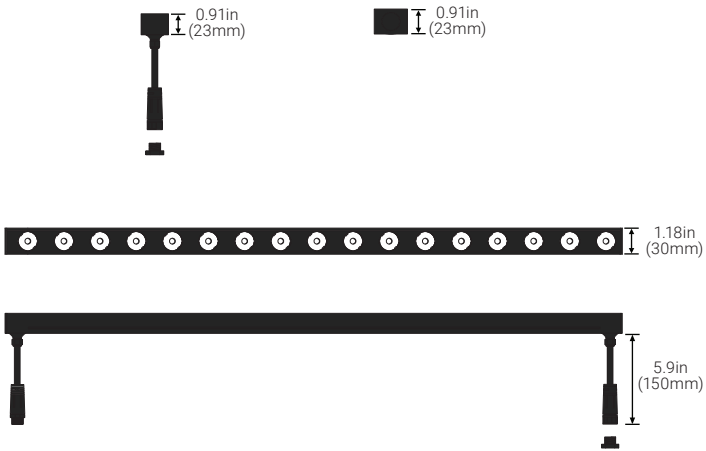

WHITE LIGHT

27K

3K

35K

4K

5K

65K


STATIC

RED

GREEN

BLUE

RGBW



27K

3K


35K

4K

5K

65K

RGBWDMX



27K

3K

35K

4K

5K

65K

PROJECT:

TYPE:

QUANTITY:

ORDER CODE


MODEL	INPUT VOLTAGE	FUNCTION	OPTICS	LENGTH	POWER ENTRY	FINISH	CUSTOM
PPF	24					BG	
PARIAH PRO FLEX PPF	24V DC	24	2700K 27	10° WL 10	1ft 1	SIDE FEED SF	BLACK/ GRAY BG
			3000K 3	15° WL 15	2ft 2	BOTTOM FEED BF	
			3500K 35	20° WL 20	3ft 3	FRONT FEED FF	
			4000K 4	25° 20	4ft 4		
			5000K 5	30° 30	5ft 5		
			6500K 65	40° 40	10ft 10		
			RGB RGB	50° 50	15ft 15		
			RGBW RGBW	25°x50° 2550	CUSTOM C		
			RGBWDMX RGBWDMX	45°x(30° & Asymmetric 15) ASYM			

PROJECT:



TYPE:

QUANTITY:



LIGHT DISTRIBUTION DIAGRAM

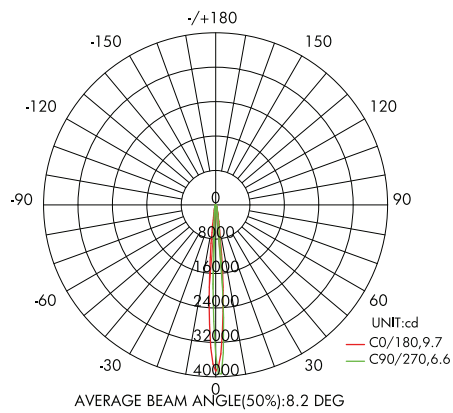


4000K, 25W/M(7.62W/ft), CRI80, 10°

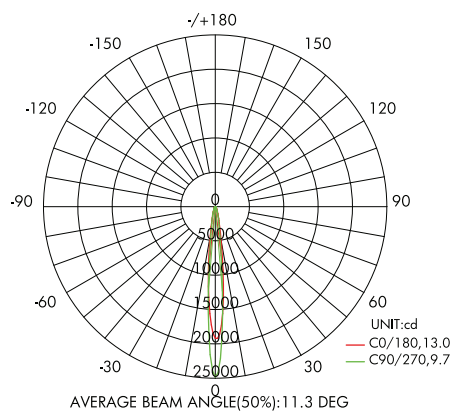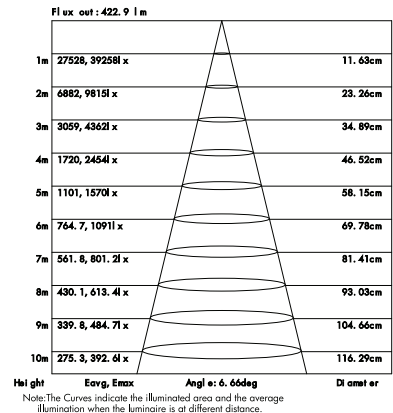

4000K, 25W/M(7.62W/ft), CRI80, 15°

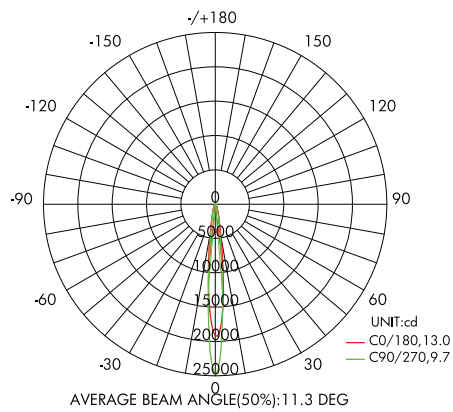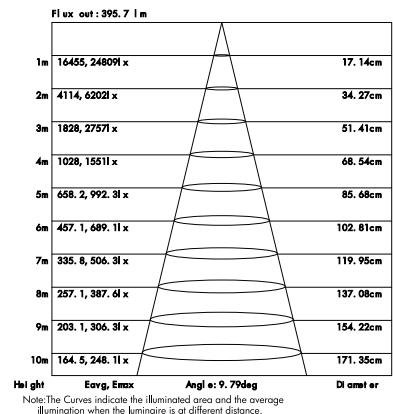

18W/M(5.49W/ft), CRI80, 20°

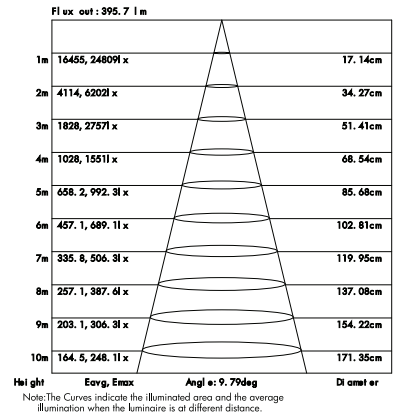


PROJECT:



TYPE:

QUANTITY:



LIGHT DISTRIBUTION DIAGRAM

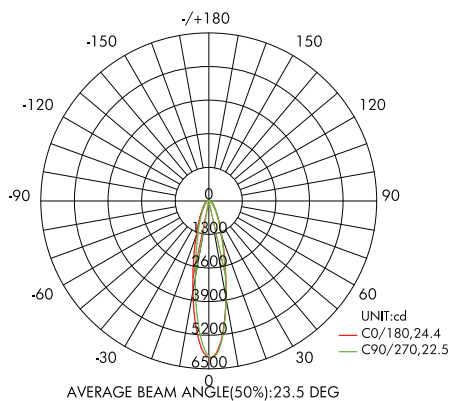


4000K, 25W/M(7.62W/ft) CRI80, 25°

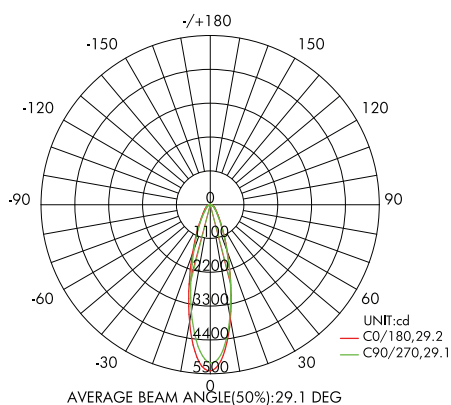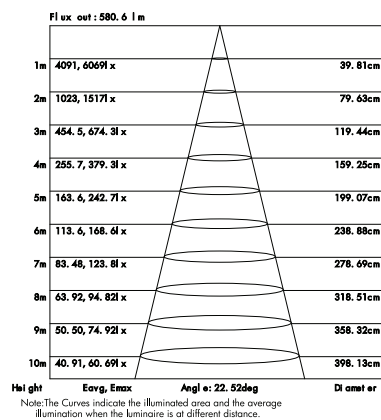

4000K, 25W/M(7.62W/ft), CRI80, 30°

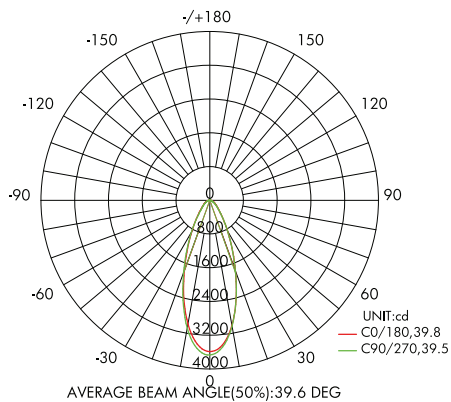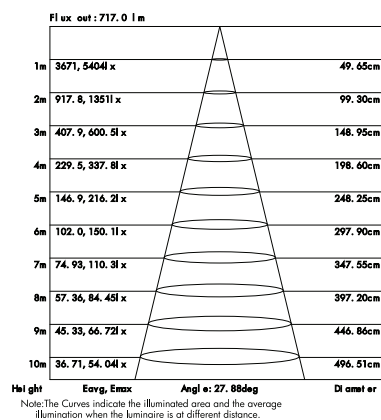

4000K, 25W/M(7.62W/ft), CRI80, 40°


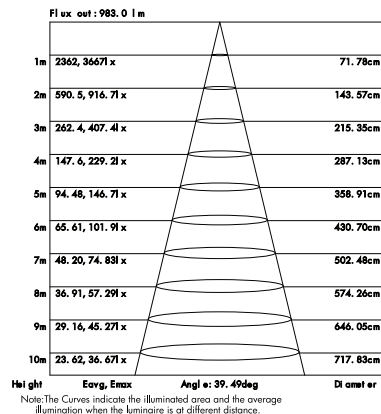


PROJECT:



TYPE:

QUANTITY:



LIGHT DISTRIBUTION DIAGRAM

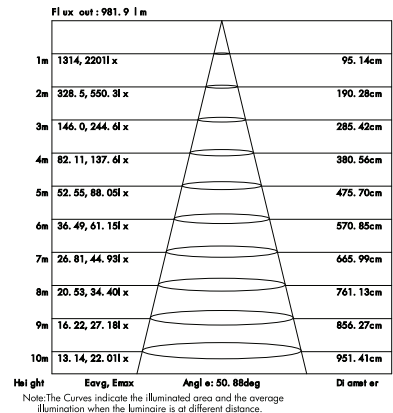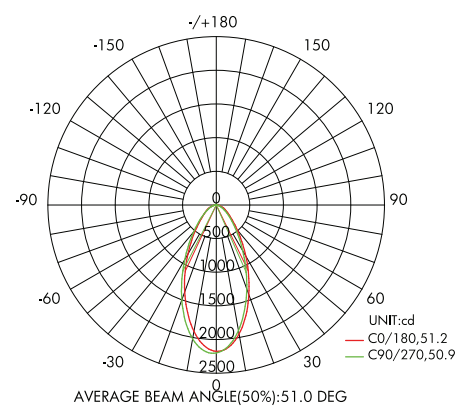

4000K, 25W/M (7.62W/ft), CRI80, 50°

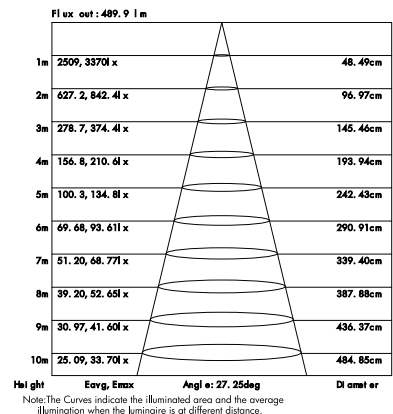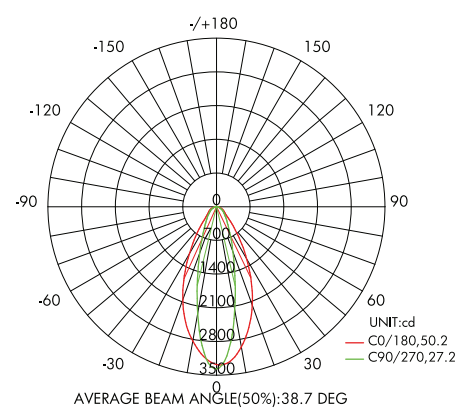

4000K, 25W/M (7.62W/ft), CRI80, 25°*50°

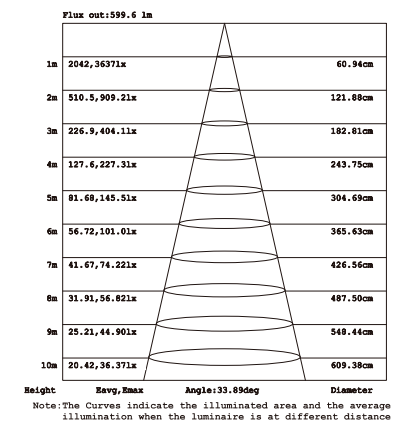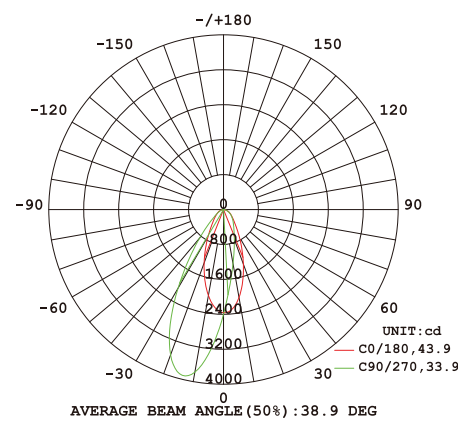



4000K, 25W/M (7.62W/ft), CRI80, 45°* (30° & asymmetric 15°)

PROJECT:



TYPE:

QUANTITY:



LIGHT DISTRIBUTION DIAGRAM

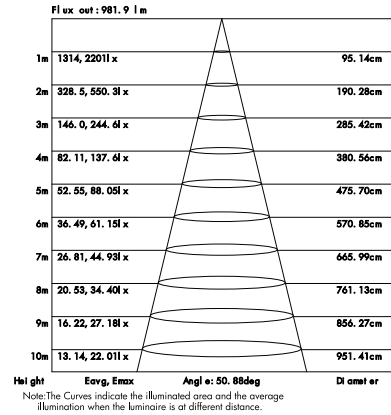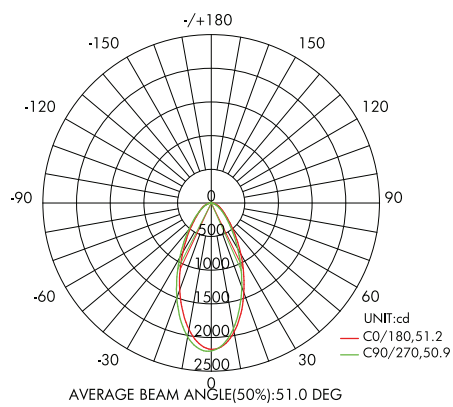

4000K, 25W/M (7.62W/ft), CRI80, 50°

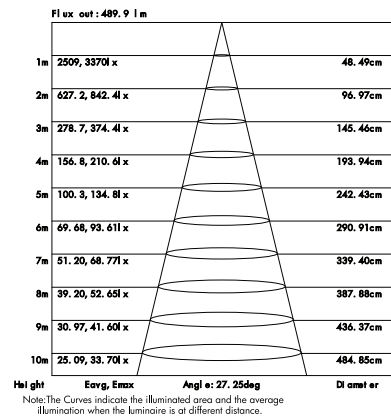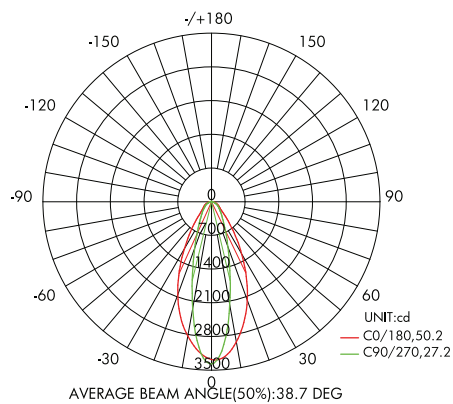

4000K, 25W/M (7.62W/ft), CRI80, 25°*50°

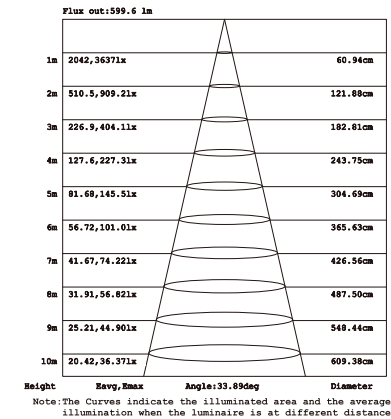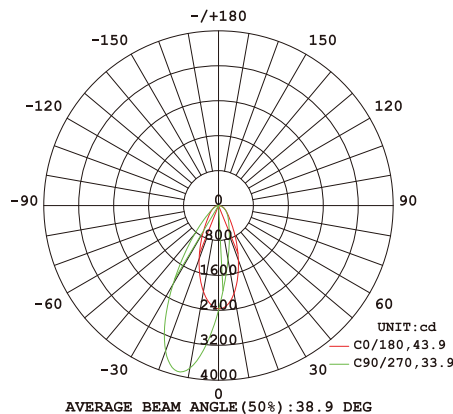


PROJECT:


TYPE:

QUANTITY:

OPTICS

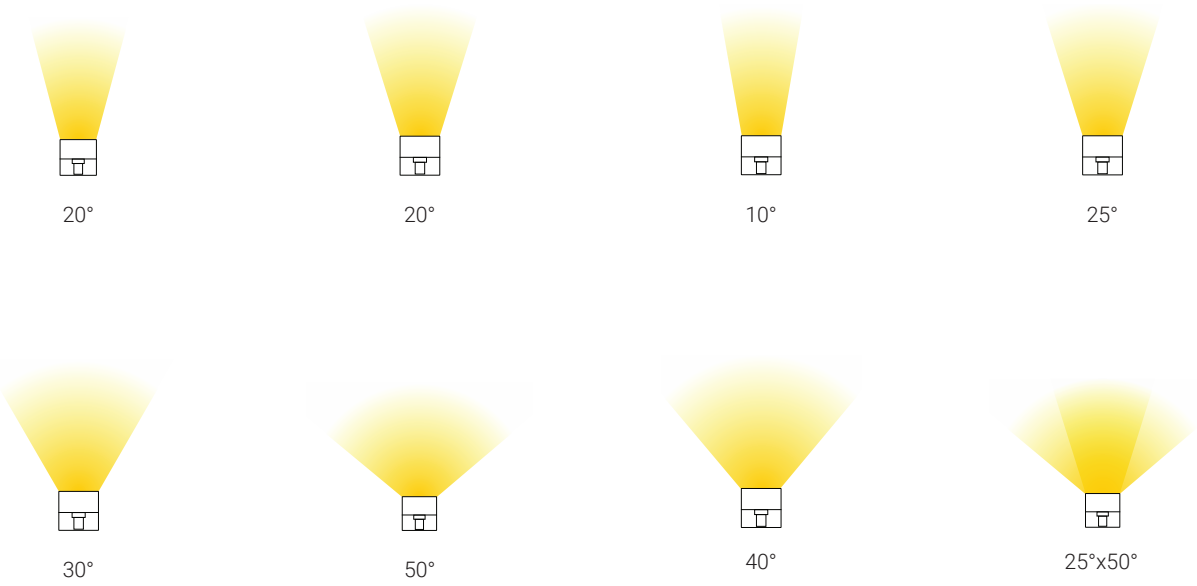

BENDING DIAMETER

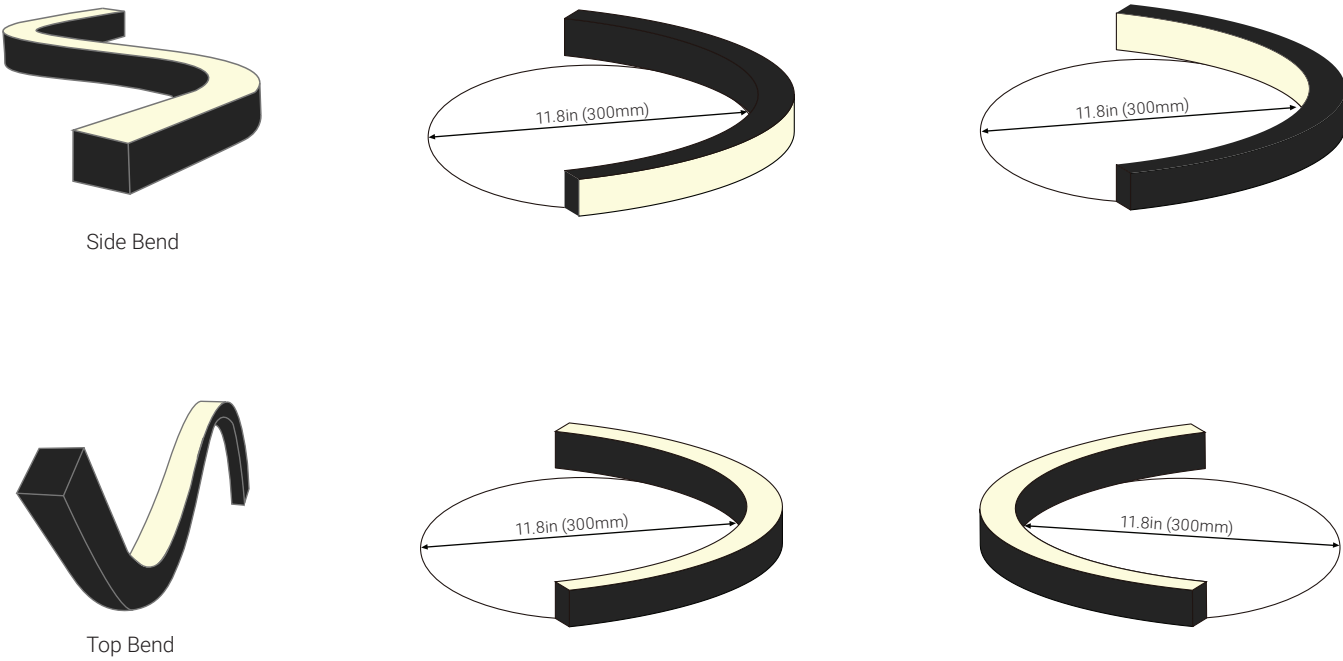

Product specifications and features are subject to change without notice. For the most up to date information, please visit our website. © 2025 Pariah Lighting. All rights reserved.

PROJECT:



TYPE:

QUANTITY:

MOUNTING OPTIONS




BRACKET AND SCREW

Order Code PPF-BS

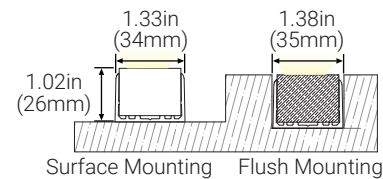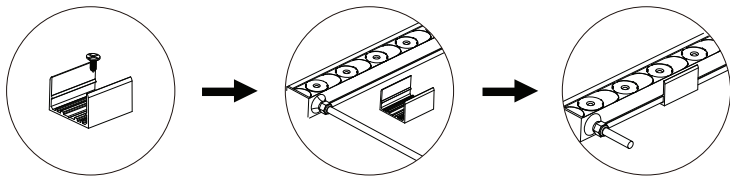

ALUMINUM PROFILE 4FT



Order Code PPF-AP-4

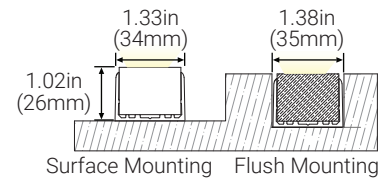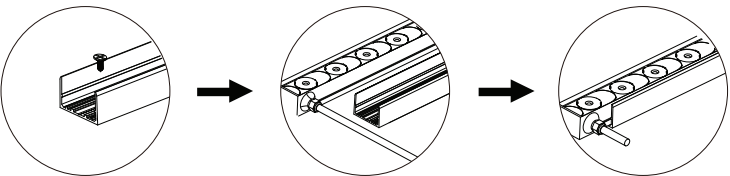

FLEXIBLE PROFILE

3.94ft(1.2M) Per Piece




Order Code PPF-FP-4

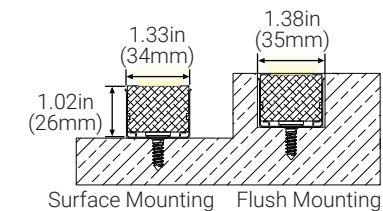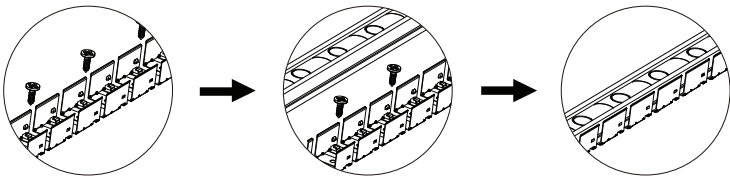

ROTATABLE BRACKET


Together with bracket, or aluminum channel

Order Code PPF-RB

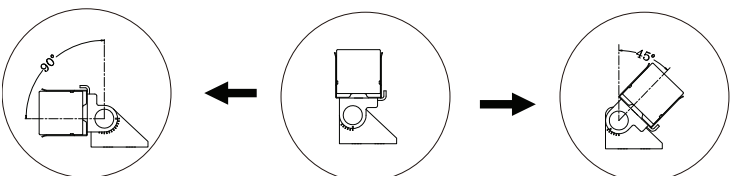


On ground

Surface Mounting



On Wall



On Ceiling

Product specifications and features are subject to change without notice. For the most up to date information, please visit our website. © 2025 Pariah Lighting. All rights reserved.