

PROJECT:

TYPE:

QUANTITY:




DYNAMIC WHITE

SPECIFICATIONS	
CCT	18K, 22K, 27K, 3K, 35K, 4K, 65K, Custom
DMX	RGBDMX, RGBW, RGBA, + Custom, Dynamic White
Static	Red, Green, Blue, Amber, Custom
CRI	>80, >90
Control	ELV, 0-10V, DMX, DALI, Dim To Warm
Optical Distribution	9°,15°, 25°, 60°, 10 x 30°, 10 x 60°, 15 x 30°, 30 x 60°
Operating Temperature	-30°C~50°C (-22°F ~ 122°F)
Power Factor	≥ 0.9
SDCM	3 Step MacAdam Ellipse
Dimensions	L: 1ft (305mm), 4ft (1220mm) W: 1 19/20" (49.6mm) H: 2 1/8" (54.5mm)
Applications	Wall Grazer, Wall Washer
Voltage	100-277V AC 50Hz/60Hz
Waterproof Rate	Wet Location, IP66

FIXTURE RUN LENGTHS			
Max Run Length	120V AC	240V AC	277V AC
Standard Output	100ft	190ft	230ft
High Output	80ft	150ft	180ft

OUTPUT		
	Lumens	Efficacy (lm/ W)
1ft	1000 - 1200 lm	80 - 85
4ft	4000 - 4800 lm	80 - 100

STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.

Intertek


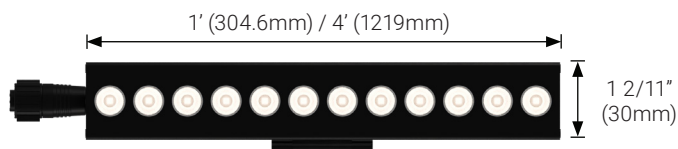
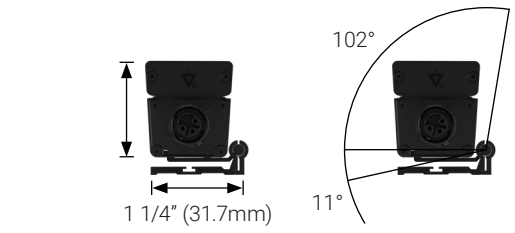
DESCRIPTION

Pro Graze is a compact, high-performance linear LED fixture engineered to deliver uniform, high-quality illumination for architectural accenting. Designed to enhance features such as moldings, archways, and window details, Pro Graze provides precision grazing and wall-washing capabilities across a wide range of surfaces.

Its low-profile housing and integral wiring enable clean, continuous end to end installation with minimal visual interruption, ideal for both interior and exterior applications. With a variety of available lengths, beam angles, and mounting options, Pro Graze offers design flexibility to meet diverse project requirements.

- Multiple dimming interface: ELV, 0-10V, DMX, DALI
- Two power options: Standard Output and High Output
- Wide range CCT: 1800K-6500K, 3-Step MacAdam Ellipse, CRI90+
- Two standard lengths: 1FT (305 mm) and 4FT (1219 mm)
- End-to-end connectors

DIMENSIONS



WHITE LIGHT

18K

22K

27K

3K

35K

4K

65K

CUSTOM

DIM TO WARM + DMX, DYNAMIC WHITE

22K

65K

18K

3K


27K

35K

65K

CUSTOM

RGB DMX



18K

22K

27K

3K

35K

4K

65K

CUSTOM

CUSTOM

PROJECT:

TYPE:

QUANTITY:

ORDER CODE

MODEL		INPUT VOLTGE		WATTAGE		FUNCTION		CONTROL		OPTICS		LENGTH		FINISH		APPLICATION		
PG																		
PRO GRAZE	PG	100-277V AC		UNI	STANDARD OUPUT	SO	1800K	18	ELV	ELV	3"	3	1FT	1	BLACK	B	INTERIOR	IN
		240V AC		240	HIGH OUPUT	HO	2200K	22	MoT	MoT	9"	9	4FT	4			EXTERIOR	EX
					2700K	27	DALI	DL	15°	15								
					3000K	3	DMX	DMX	25°	25								
					3500K	35	DMX RDM	DMXRDM	60°	60								
					4000K	4	RDM	RDM	10°x30°	1030								
					5000K	5	0-10V	010V	10°x60°	1060								
					6500K	65	DIM TO		15°x30°	1530								
					RED	R	WARM ELV	DMXELV	30°x60°	3060								
					GREEN	G	DIM TO											
					BLUE	B	WARM DMX	DMWDMX										
					VIOLET	V	DIM TO											
					CUSTOM	CS	WARM 0-10V	DMX010V										
					AMBER	A												
					RGB	RGB												
					RGB AMBER	RGBA												
					RGB 2700K	RGB27												
					RGB 3000K	RGB3												
					RGB 4000K	RGB4												
					DYNAMIC WHITE													
					+ DIM TO WARM													
					+ 2200K-6500K DYWDWM2265													
					DYNAMIC WHITE													
					+ DIM TO WARM													
					+ 1800K-3000K DYWDWM183													

ACCESSORIES


MOUNTING		LOUVER		LEADER CABLES		JUMPER CABLES		END CAP	
FIXED/ FLAT BRACKET	PGFB	SYMMETRIC	PGSYM1	Leader Cable 5 Pin 10ft (3m)	PGLC5P10	Jumper Cable 5 Pin 1ft (0.3m)	PGJC5P1	END CAP 5PIN	PG5PEC
ROTARY BRACKET	PGRB	ASYMMETRIC	PGSASY1	Leader Cable 5 Pin 30ft (9m)	PGLC5P30	Jumper Cable 5 Pin 4ft (1.21m)	PGJC5P4		
		HONEYCOMB	PGSHON1			Jumper Cable 5 Pin 6ft (1.82m)	PGJC5P6		
						Jumper Cable 5 Pin 10ft (3m)	PGJC5P10		
						Jumper Cable 5 Pin 15ft (4.5m)	PGJC5P15		

PROJECT:


TYPE:

QUANTITY:


LENGTH OPTIONS

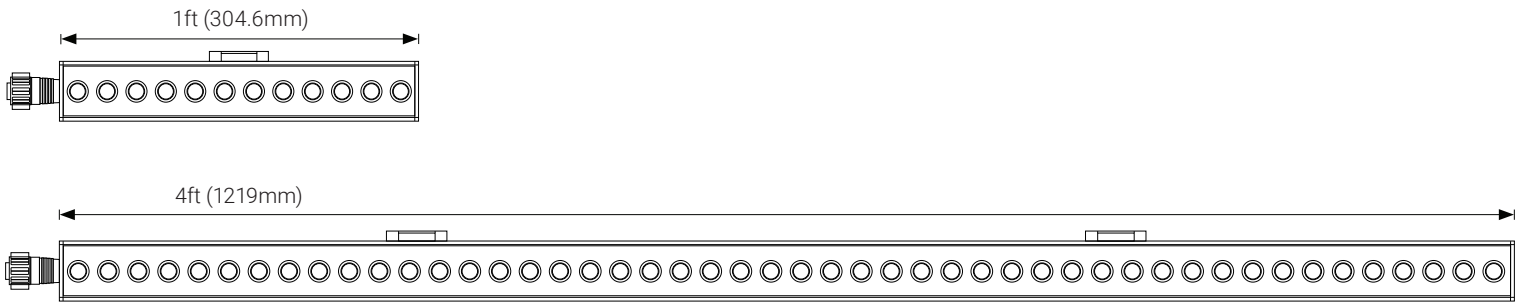

OPTICS

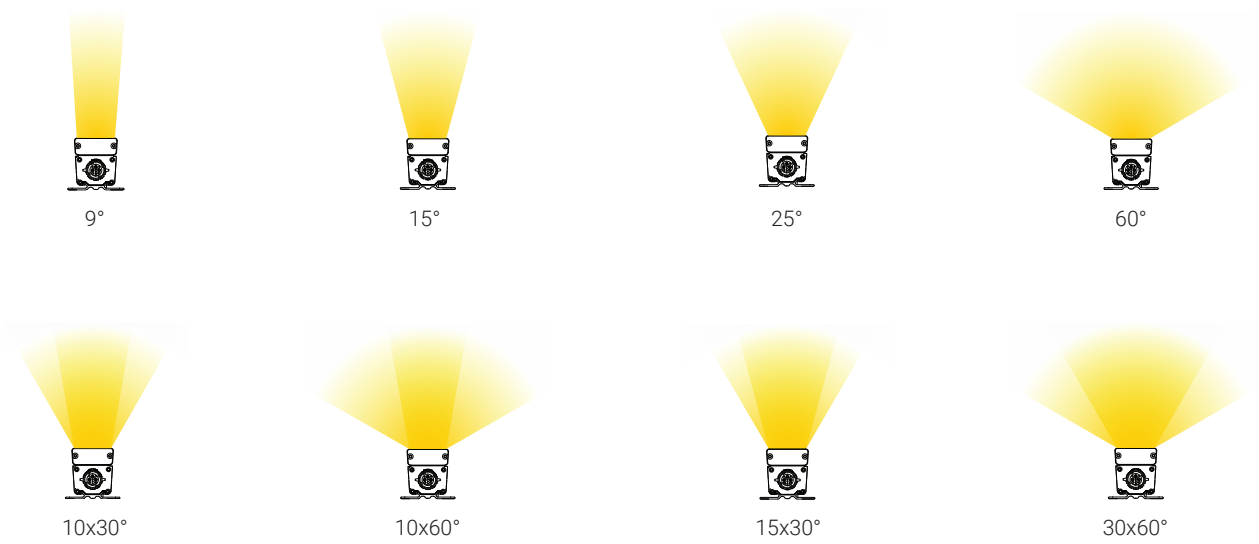

ROTATION ANGLE

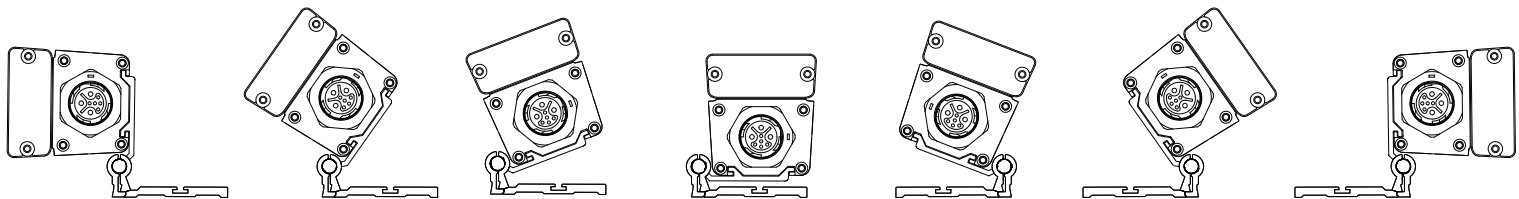


PROJECT:


TYPE:

QUANTITY:

5 PIN

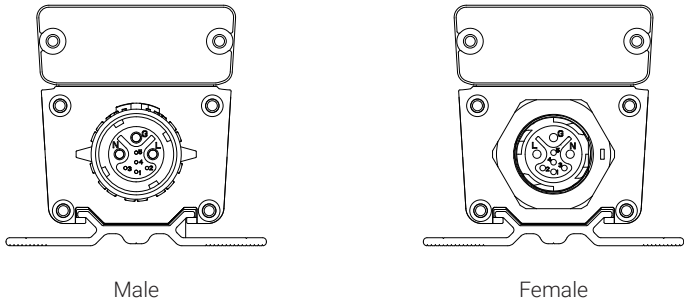


ANGLE ADJUSTMENT LIMIT

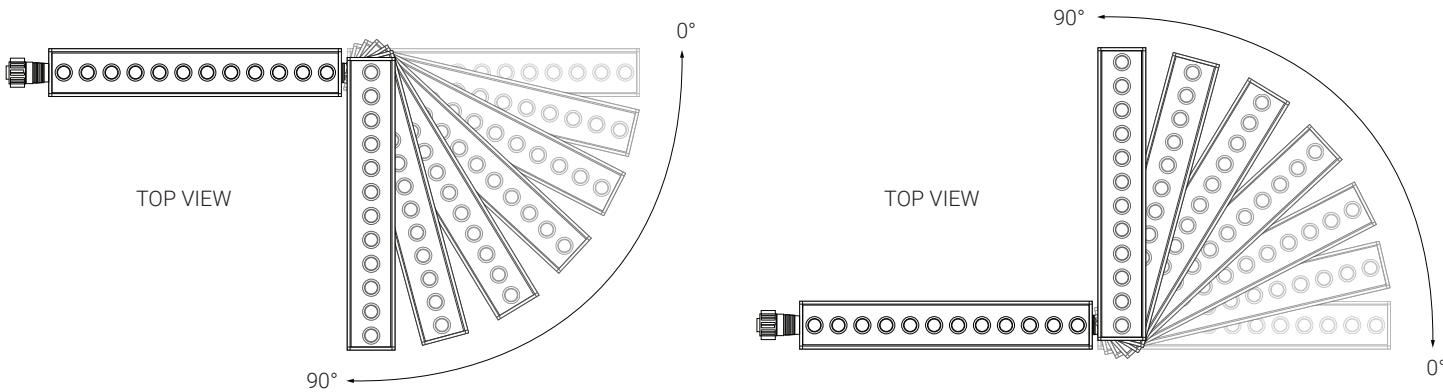

LEADER CABLES

LEADER CABLES 5 PIN

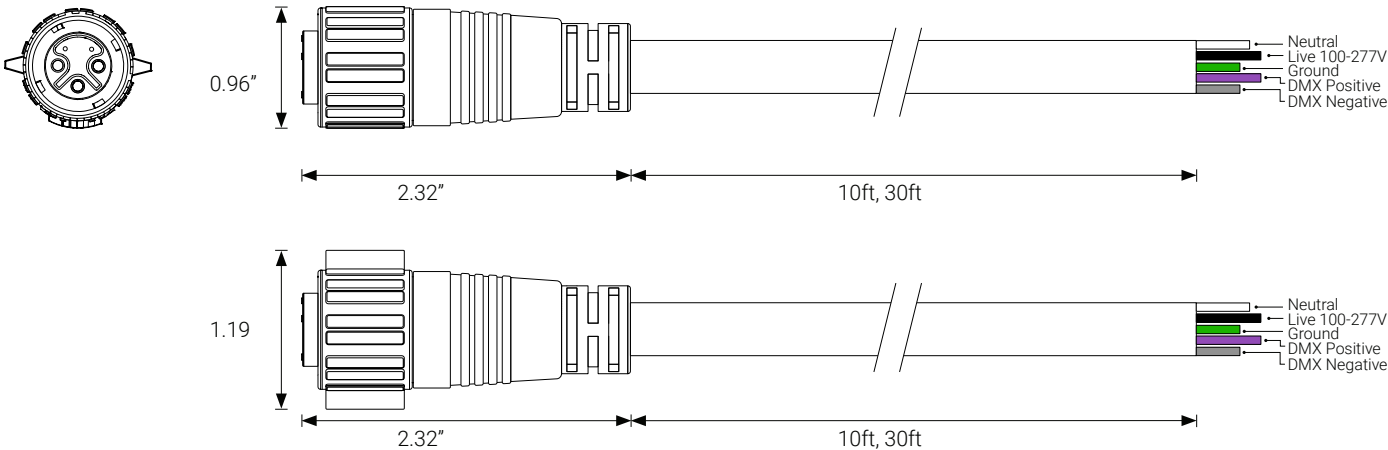

Product specifications and features are subject to change without notice. For the most up to date information, please visit our website. © 2025 Pariah Lighting. All rights reserved.