


PROJECT: _____ TYPE: _____ QUANTITY: _____

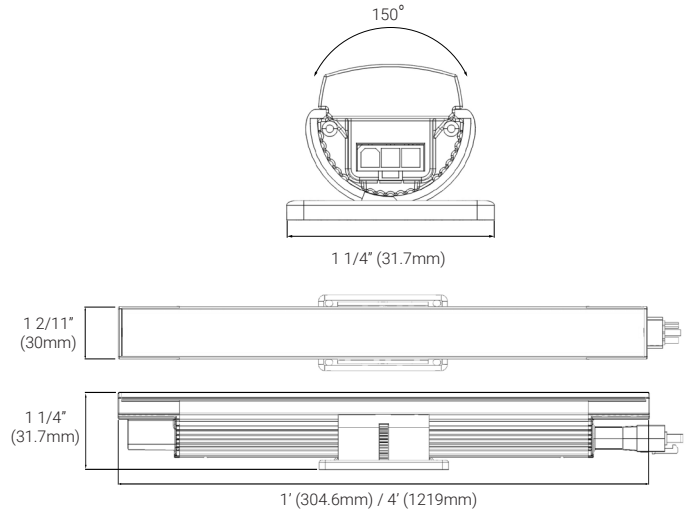


CCT	18K, 22K, 27K, 3K, 35K, 4K, 5K, 65K
DMX	RGB, RGBW, RGBA, MONO, DYW, DMW CUSTOM
CRI	UP TO 98, UL Diamond rated
Control	ELV, DALI, MoT, DMX, DMX RDM, DMX DALI, Dim to Warm ELV, Dim to Warm DMX
Optical Distribution	120°, 30°x100°
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Power Factor	≥ 0.9
SDCM	2- Step MacAdam Ellipse
Dimensions	L: 1ft (305mm), 4ft (1219.2mm) W: 1 1/2" (30mm) H: 1 1/4" (31.7mm)
Applications	Cove and Indirect General Illumination
Voltage	100-277V AC 50Hz/60Hz
Warranty	5 Years

FIXTURE RUN LENGTHS


	120V AC	240V AC	277V AC
Max Run Length	120ft	240ft	240ft
Standard Output	50ft	100ft	100ft
High Output			

	Lumens	Efficacy (lm/W)
1ft	450 - 950 lm	80 - 85
4ft	1900 - 3800 lm	100


WHITE LIGHT





DIM TO WARM + DMX

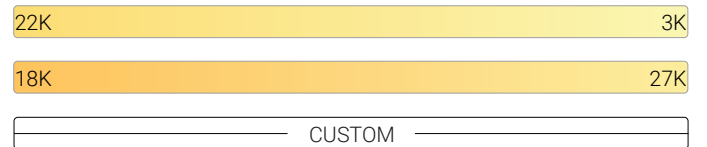

RGB DMX

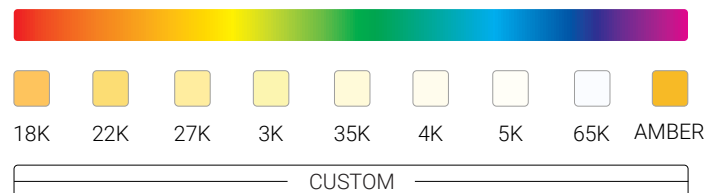


STANDARDS & CERTIFICATIONS

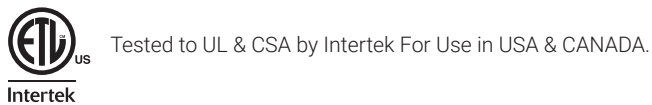

PROJECT: _____ TYPE: _____ QUANTITY: _____

CCT	ASD	Ra	R1	R2	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R16
2700K	10%	97	95	100	97	98	99	96	96	97	97	94	94	98	96	92	94	96	97
3000K	9%	98	95	100	97	99	98	95	97	97	99	98	96	96	93	95	97	97	99
3500K	8%	98	95	99	97	99	98	97	98	98	98	99	95	98	96	95	97	98	99
4000K	8%	97	95	99	99	99	96	97	99	99	98	99	94	97	97	94	98	97	98
5000K	9%	98	96	99	99	98	98	98	98	97	97	97	96	96	99	95	98	99	99
6500K	8%	97	95	98	99	99	99	96	98	99	97	97	93	99	97	91	98	99	99

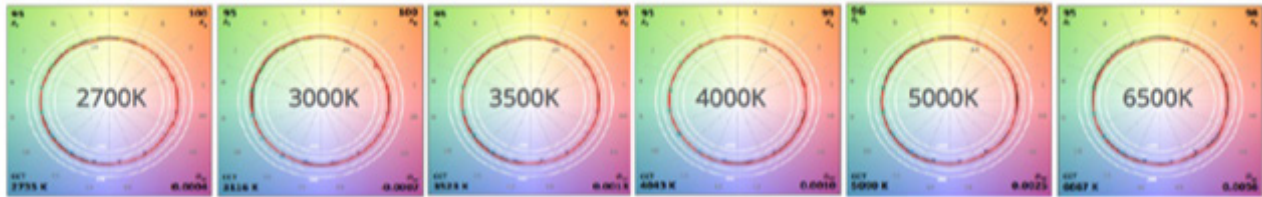

ACCESSORIES

- Leader Cable 3 Pin 10ft (3m)
- Jumper Cable 3 Pin 1ft (0.3m)
- Jumper Cable 3 Pin 4ft (1m)
- Terminator 3 Pin
- Leader Cable 5 Pin 10ft (3m)
- Jumper Cable 5 Pin 1ft (0.3m)
- Jumper Cable 5 Pin 4ft (1m)
- Terminator 5 Pin
- Mounting Track
- Honeycomb Louver 1ft (0.3m)
- Symmetric Louver 1ft (0.3m)
- Asymmetric Louver 1ft (0.3m)

PROJECT: _____ TYPE: _____ QUANTITY: _____

ORDER CODE

MODEL	INPUT VOLTAGE	WATTAGE	FUNCTION	CONTROL	OPTICS	LENGTH	FINISH	APPLICATION								
PPC							B	IN								
PARIAH PRO	100-277VAC	UNI	STANDARD OUTPUT	SO	1800K	18	ELV	ELV	120°	120	1ft	1	BLACK	B	INTERIOR	IN
COVE	240V AC	240	HIGH OUTPUT	HO	2200K	22	MoT	MoT	30°x100°	100	4ft	4				
					2700K	27	DALI	DALI								
					3000K	3	DMX	DMX								
					3500K	35	DMXRDM	DMXRDM								
					4000K	4	RDM	RDM								
					5000K	5	0-10V	010V								
					6500K	65	DIM TO WARM									
					RGB	RGB	ELV	DMWELV								
					RGB 3000K	RGB3	DIM TO WARM									
					RGB 3500K	RGB35	DMX	DMWELV								
					RGB 4000K	RGB4	DIM TO WARM									
					RGB AMBER	RGBA	0-10	DMW010								
					DIM TO WARM	DMW										
					DYNAMIC WHITE	DYW										
					RED	R										
					GREEN	G										
					BLUE	B										
					VIOLET	V										
					CUSTOM	C										