


PROJECT: _____ TYPE: _____ QUANTITY: _____

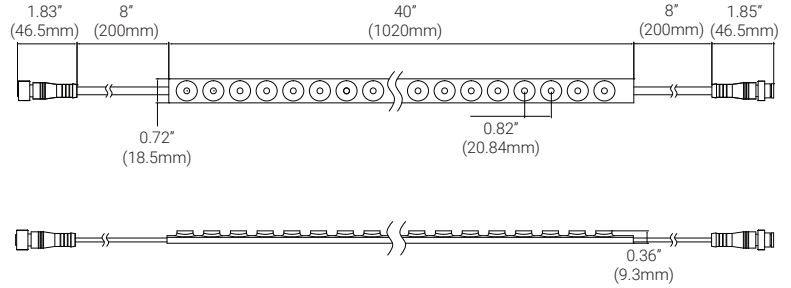

CCT	18K, 22K, 27K, 3K, 35K, 4K, 65K, 27K+65K RGB, RGBW, RGBDMX, DIM TO WARM
CRI	>90
Control	0-10V, ELV, MLV, SWITCHED, SPI, DMX
Optical Distribution	15°, 20°, 25°, 45°, 115°, 15°x45°, 20°x50°, 25°x50°
Storage Temperature	-13°F ~ 140°F (-25°C ~ 60°C)
SMD Type	2835
Dimensions	L: 40" (1020mm) W: 0.72" (18.5mm) H: 0.36" (9.3mm)
Applications	IP67, Wet Location, Cove, Perimeter Lighting, Grazing
Voltage	24V DC
Warranty	5 Years

FIXTURE RUN LENGTHS

Max Run Length	20ft
----------------	------

ACCESSORIES

Aluminum Clip	Mounting Set
Adjustable Angle Clip	Male and Female Connector
Aluminum Profile	T Type Connector

STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.

Standard Output	464 - 595 lm/ft	4.9 - 5.6w/ft
-----------------	-----------------	---------------

WHITE LIGHT

						
18K	22K	27K	3K	35K	4K	65K







STATIC

				
RED	GREEN	BLUE	AMBER	CUSTOM

DIM TO WARM + DMX

18K	27K	
22K	27K	
27K	35K	
22K	4K	65K
CUSTOM		

RGB + RGBW DMX

				
				
27K	3K	35K	4K	AMBER

PROJECT: _____ TYPE: _____ QUANTITY: _____

ORDER CODE

MODEL		WATTAGE		FUNCTION		OPTICS		LENGTH		FINISH		CUSTOM	
PLF				SO				B					
PRO LF	PLF	SO	SO	1800K	18	15°	15	1ft	1	BLACK	B		
				2200K	22	20°	20	2ft	2				
				2700K	27	25°	25	3ft	3				
				3000K	3	45°	45	4ft	4				
				3500K	35	115°	115	5ft	5				
				4000K	4	15°x45°	1545	10ft	10				
				6500K	65	20°x50°	2050	15ft	15				
				RGB	RGB	25°x50	2550	20ft	20				
				RGBW	RGBW			Custom	C				
				DIM TO WARM	DMW								
				DYNAMIC WHITE	DYW								