


PROJECT: _____ TYPE: _____ QUANTITY: _____

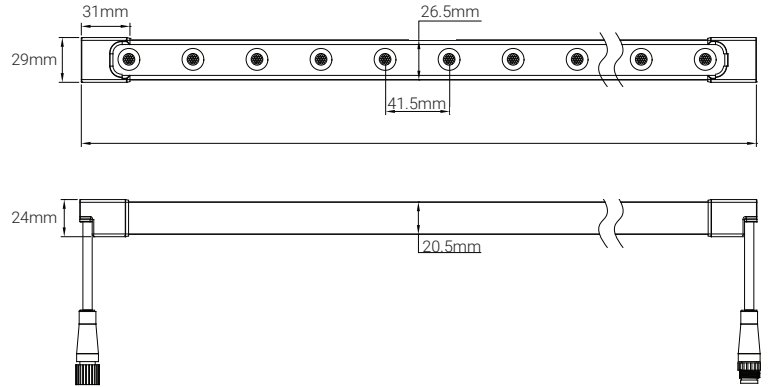

CCT	18K, 22K, 27K, 3K, 35K, 4K, 65K, 27K+65K RGB, RGBW, RGBDMX, DIM TO WARM
CRI	UP TO 93
Control	0-10V, ELV, MLV, SWITCHED
Optical Distribution	15°, 30°, 50°, 18°x 20°, 20°x 35°, 20°x 55°, 10° x 60°
Storage Temperature	-13°F ~ 104°F (-25°C ~ 40°C)
LED PIN Temperature	Max 149°F (65°C)
SMD Type	2835
Dimensions	L: 1ft (0.3m), 4ft (1.2m) W: 1 1/8" (29mm) H: 15/16" (24 mm)
Applications	Wet, Cove, Perimeter Lighting, Grazing
Voltage	24V DC
Warranty	5 Years

Low Output	120 - 360 lm/ft
Standard Output	390 - 520 lm/ft
High Output	560 - 780 lm/ft


WHITE LIGHT



STATIC




DIM TO WARM + DMX

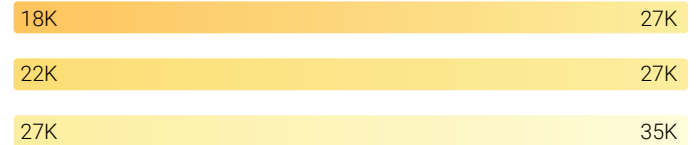

CUSTOM



RGB + RGBW DMX

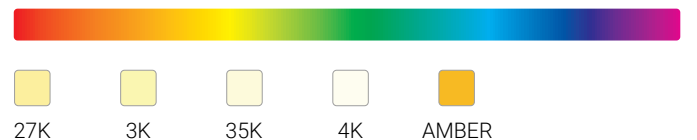

FIXTURE RUN LENGTHS

Max Run Length	15' - 25'
----------------	-----------

ACCESSORIES

Aluminum Clip	
Adjustable Angle Clip	
Aluminum Profile	

STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.



PROJECT: _____ TYPE: _____ QUANTITY: _____

ORDER CODE

MODEL	WATTAGE	FUNCTION	OPTICS	LENGTH	FINISH	CUSTOM					
PPF				B							
PARIAH PRO FLEX PPF	LOW OUTPUT	LO	1800K	18	15°	15	1ft	1	BLACK/ GRAY	BG	
	STANDARD		2200K	22	30°	30	2ft	2			
	OUTPUT	SO	2700K	27	50°	50	3ft	3			
	HIGH OUTPUT	HO	3000K	3	18"x20°	1820	4ft	4			
			3500K	35	20"x35°	2035	5ft	5			
			4000K	4	20"x55°	2055	10ft	10			
			6500K	65	10"x60°	1060	15ft	15			
			RGB				CUSTOM	C			
			RGBW								
			DIM TO WARM								
			DYNAMIC WHITE								