


PROJECT: _____ TYPE: _____ QUANTITY: _____

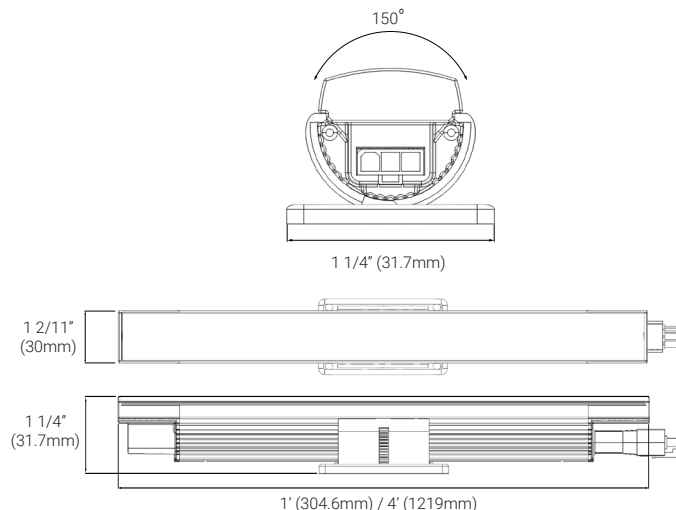

CCT	18K, 22K, 27K, 3K, 35K, 4K, 65K
DMX	RGB, RGBW, RGBA, MONO, DYW, DMW CUSTOM
CRI	UP TO 98, UL Diamond rated
Control	ELV, DALI, MoT, DMX, DMX RDM, DMX DALI, Dim to Warm ELV, Dim to Warm DMX
Optical Distribution	120°, 30°x100°,
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Power Factor	≥ 0.9
SDCM	2- Step MacAdam Ellipse
Dimensions	L: 1ft (305mm), 4ft (1219.2mm) W: 1 2/11" (30mm) H: 1 1/4" (31.7mm)
Applications	Cove and Indirect General Illumination
Voltage	100-277V AC 50Hz/60Hz
Warranty	5 Years

FIXTURE RUN LENGTHS

Max Run Length	120V AC	240V AC	277V AC
Standard Output	120ft	240ft	240ft
High Output	50ft	100ft	100ft

	Lumens	Efficacy (lm/W)
1ft	450 - 950 lm	80 - 85
4ft	1900 - 3800 lm	100

WHITE LIGHT

						
18K	22K	27K	3K	35K	4K	65K

DIM TO WARM + DMX

22K	3K
18K	27K
CUSTOM	

RGB DMX

							
							
18K	22K	27K	3K	35K	4K	65K	AMBER
CUSTOM							


STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.




Color rendition rating, Diamond. Based on IES TM-30-20.



PROJECT: _____ TYPE: _____ QUANTITY: _____

CCT	ASD	Ra	R1	R2	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R16
2700K	10%	97	95	100	97	98	99	96	96	97	97	94	94	98	96	92	94	96	97
3000K	9%	98	95	100	97	99	98	95	97	97	99	98	96	96	93	95	97	97	99
3500K	8%	98	95	99	97	99	98	97	98	98	98	99	95	98	96	95	97	98	99
4000K	8%	97	95	99	99	99	96	97	99	99	98	99	94	97	97	94	98	97	98
5000K	9%	98	96	99	99	98	98	98	98	97	97	97	96	96	99	95	98	99	99
6500K	8%	97	95	98	99	99	99	96	98	99	97	97	93	99	97	91	98	99	99

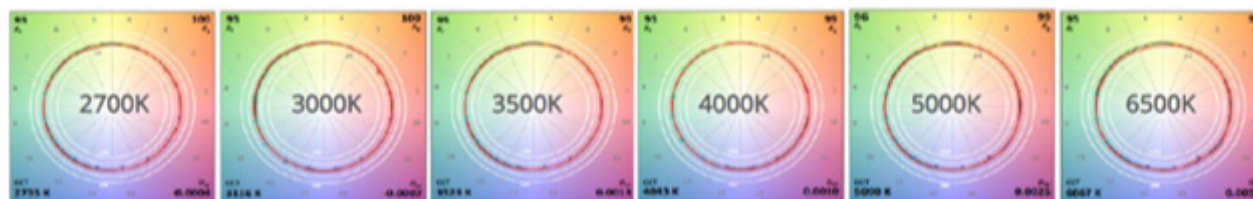

ACCESSORIES

Leader Cable 3 Pin 10ft (3m)

Jumper Cable 3 Pin 1ft (0.3m)

Jumper Cable 3 Pin 4ft (1m)

Terminator 3 Pin

Leader Cable 5 Pin 10ft (3m)

Jumper Cable 5 Pin 1ft (0.3m)

Jumper Cable 5 Pin 4ft (1m)

Terminator 5 Pin

Mounting Track

Honeycomb Louver 1ft (0.3m)

Symmetric Louver 1ft (0.3m)

Asymmetric Louver 1ft (0.3m)



PROJECT: _____

TYPE: _____

QUANTITY: _____

ORDER CODE

MODEL	INPUT VOLTAGE	WATTAGE	FUNCTION	CONTROL	OPTICS	LENGTH	FINISH	APPLICATION								
PPC							B	IN								
PARIAH PRO COVE	100-277VAC	UNI	STANDARD OUTPUT	SO	1800K	18	ELV	ELV	120°	120	1ft	1	BLACK	B	INTERIOR	IN
	240V AC	240	HIGH OUTPUT	HO	2200K	22	MoT	MoT	30"x100"	100	4ft	4				
					2700K	27	DALI	DALI								
					3000K	3	DMX	DMX								
					3500K	35	DMX RDM	DMX RDM								
					4000K	4	RDM	RDM								
					6500K	65	0-10V	010V								
					RGB	RGB	DIM TO WARM									
					RGB 3000K	RGB3	ELV	DMWELV								
					RGB 3500K	RGB35	DIM TO WARM									
					RGB 4000K	RGB4	DMX	DMWELV								
					RGB AMBER	RGBA	DIM TO WARM									
					DIM TO WARM	DMW	0-10	DMW010								
					DYNAMIC WHITE	DYW										
					RED	R										
					GREEN	G										
					BLUE	B										
					VIOLET	V										
					CUSTOM	C										