


PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

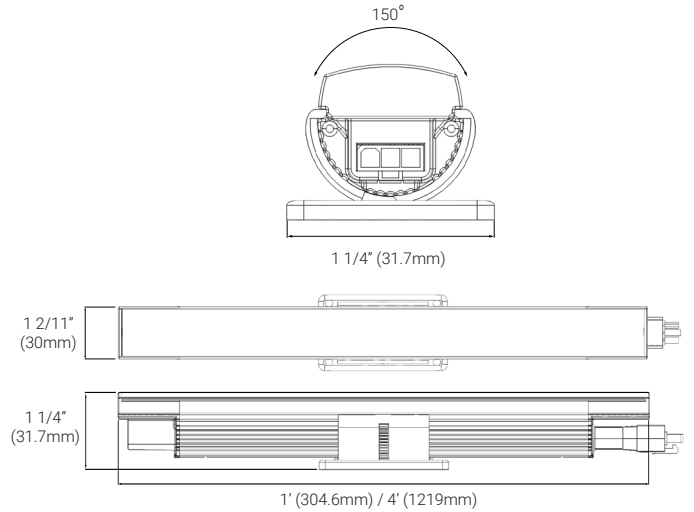

CCT	18K, 22K, 27K, 3K, 35K, 4K, 5K, 65K
DMX	RGB, RGBW, RGBA, MONO, DYW, DMW CUSTOM
CRI	UP TO 98, UL Diamond rated
Control	ELV, DALI, MoT, DMX, DMX RDM, DMX DALI, DMX 0-10V, Dim to Warm ELV, Dim to Warm DMX
Optical Distribution	200°, 170°, 30°x100°
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Power Factor	≥ 0.9
SDCM	2- Step MacAdam Ellipse
Dimensions	L: 1ft (305mm), 4ft (1219.2mm) W: 1 2/11" (30mm) H: 1 1/4"(31.7mm)
Applications	Cove and Indirect General Illumination
Voltage	100-277V AC 50Hz/60Hz
Warranty	5 Years

FIXTURE RUN LENGTHS

	120V AC	240V AC	277V AC
Max Run Length	120ft	240ft	240ft
Standard Output	120ft	240ft	240ft
High Output	50ft	100ft	100ft


  

	Lumens	Efficacy (lm/W)
1ft	450 - 950 lm	80 - 85
4ft	1900 - 3800 lm	100


WHITE LIGHT



DIM TO WARM + DMX

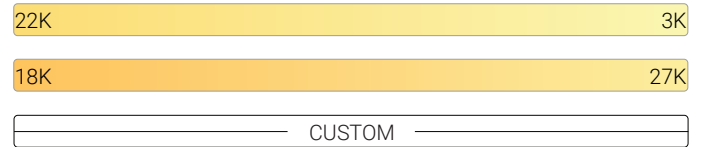

RGB DMX

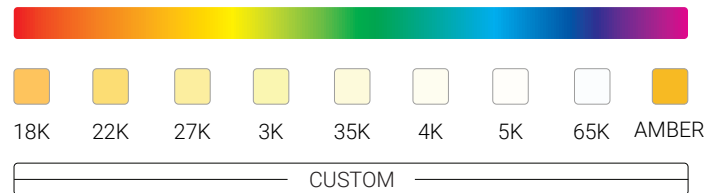

STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.

Intertek




Color rendition rating, Diamond. Based on IES TM-30-20.



PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

CCT	ASD	Ra	R1	R2	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R16
2700K	10%	97	95	100	97	98	99	96	96	97	97	94	94	98	96	92	94	96	97
3000K	9%	98	95	100	97	99	98	95	97	97	99	98	96	96	93	95	97	97	99
3500K	8%	98	95	99	97	99	98	97	98	98	98	99	95	98	96	95	97	98	99
4000K	8%	97	95	99	99	99	96	97	99	99	98	99	94	97	97	94	98	97	98
5000K	9%	98	96	99	99	98	98	98	98	97	97	97	96	96	99	95	98	99	99
6500K	8%	97	95	98	99	99	99	96	98	99	97	97	93	99	97	91	98	99	99

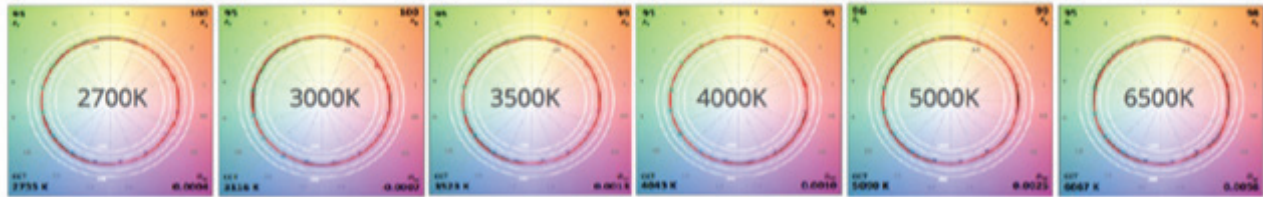

ACCESSORIES

- Leader Cable 3 Pin 10ft (3m) \_\_\_\_\_
- Jumper Cable 3 Pin 1ft (0.3m) \_\_\_\_\_
- Jumper Cable 3 Pin 4ft (1m) \_\_\_\_\_
- Terminator 3 Pin \_\_\_\_\_
- Leader Cable 5 Pin 10ft (3m) \_\_\_\_\_
- Jumper Cable 5 Pin 1ft (0.3m) \_\_\_\_\_
- Jumper Cable 5 Pin 4ft (1m) \_\_\_\_\_
- Terminator 5 Pin \_\_\_\_\_
- Mounting Track \_\_\_\_\_

PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

ORDER CODE

MODEL		WATTAGE		FUNCTION		CONTROL		OPTICS		LENGTH		FINISH		CUSTOM		
<b>PPC</b>																
PARIAH PRO COVE	PPC	STANDARD	SO	1800K	18	ELV	ELV	200°	200	1ft	1ft	BLACK	B			
		OUTPUT		2200K	22	MoT	MoT	170°	170	4ft	4ft	SILVER	S			
		HIGH OUTPUT	HO	2700K	27	DALI	DALI	30°x 100°	100			WHITE	W			
					3000K	3	DMX	DMX					CUSTOM	C		
					3500K	35	DMX RDM	DMXRDM								
					4000K	4	DMX DALI	DMXDALI								
					5000K	5	DMX 0-10V	DMX010V								
					6500K	65	DIM TO									
					RGB	RGB	WARM ELV	DWMELV								
					RGBW	RGBW	DIM TO									
					RGBA	RGBA	WARM DMX	DWMDMX								
					DIM TO WARM	DMW										
					DYNAMIC WHITE	DYW										
					CUSTOM	C										